

WINDOW & FACADE

**IDEAL FOR NICHES – VERTICAL AWNINGS WITH
OPEN CONSTRUCTION**



VERTICAL S4110 | VS4300 LIGHT



VS4300 Square or round box



S4110 No box



Wall bracket incl. spring chuck

- Elegant system for use before glass fronts or roofed terraces (S4110)
- Choice of round or square self-supporting protective box (VS4300)
- Mounting options on to the wall, below the ceiling (S4110) or in the soffit
- Various guide systems: Cable, rods or aluminium profile
- Manual operation through the wall possible using gear unit/joint plate
- Coupling options for max. 3 units

S4110

	min. 40 cm max. 500 cm
	min. 40 cm max. 400 cm*

*with cable/rod design to max. 300 cm high




VS4300 LIGHT

	min. 40 cm max. 500 cm
	min. 40 cm max. 350 cm*


*from 401 cm width, max. 225 cm high



Technical dimensions in millimetres

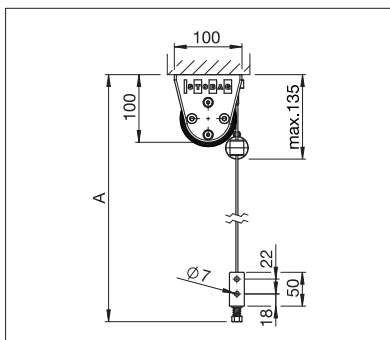

S4110 Ceiling mounting with cable guide

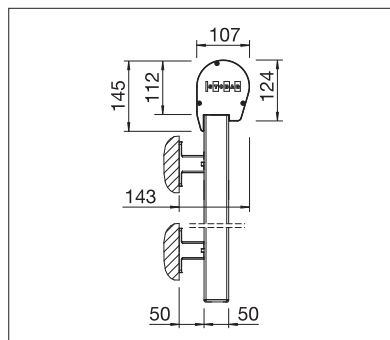

VS4300 Wall fixing with round box and guide profile



EN 13561



REGISTRATION REQUIRED



COLOURS

Discover the diverse options when selecting frame colours.



FABRICS

Choose from a comprehensive range of materials and colours.



ELECTRICS

More convenience thanks to the automated control and lighting systems.

More information at www.stobag.com

